








# DMR Head Types



# DMR Seat Types



# Mechanical Seal Material Codes

## Elastomers

- B. Buna
- E. EPR
- N. Neoprene
- V. Viton®

## Washers

- A. Bronze
- C. Carbon
- M. Phenolic
- S. Tool Steel
- X. Silicon Carbide
- Z. Tungsten Carbide

## Metal Parts

- D. Brass
- E. Monel
- F. Stainless Steel
- P. Plated Steel
- R. 316 Stainless Steel


## Seats

- A. Bronze
- G. Cast Iron
- J. Ceramic
- R. 316 Stainless Steel
- S. Tool Steel
- X. Silicon Carbide
- Z. Tungsten Carbide

## Springs

- E. Monel
- F. Stainless Steel
- P. Plated Steel
- R. 316 Stainless Steel

Viton® is a registered trade name of DuPont

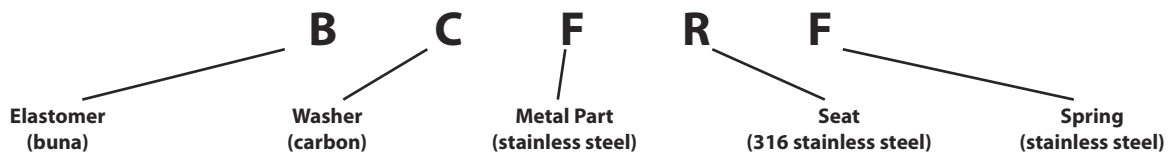

## Elastomer Temperature Limits

Buna 225°F

EPR 300°F

Neoprene 175°F

Viton 400°F

## Pressure Limitations

Type A & B Seals

75 P.S.I.

Type C, D & E Seals

200 P.S.I.